

SEPARATING PEOPLE FROM HAZARDS

Kee Rigid Anchor – Cast in Place Product Data Sheet KRA-CIP

Safe

Codes & Standards:


- OSHA 1910.66
- OSHA 1910.140
- Cal/OSHA Title 8, Section 3291
- ANSI / IWCA I-14.1
- ANSI Z359.18
- 5000 lb load without permanent deformation

Productive

- Easy to use on site
- Maintenance free
- Three attachment options for fall arrest and tie-back applications
- Suitable for all roof types

Quality


- Galvanized finish to ASTM A123
- Insulated interior to prevent thermal bridge & condensation
- Dynamically and statically tested and proven

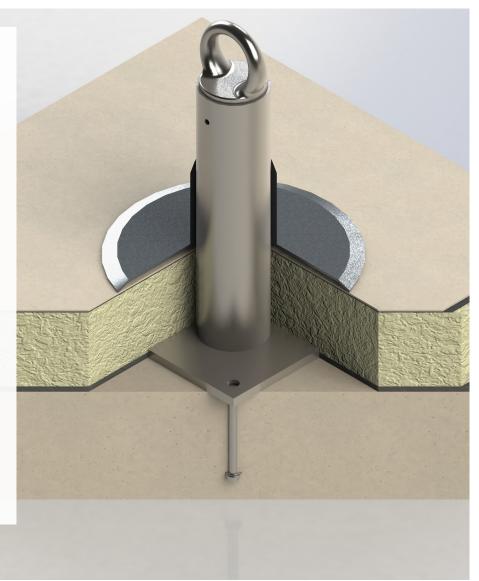

Kee Rigid Anchor – Cast in Place

Product Data Sheet KRA-CIP

Casts directly onto new concrete roof slabs of minimum grade 3000 psi and 7" thickness.

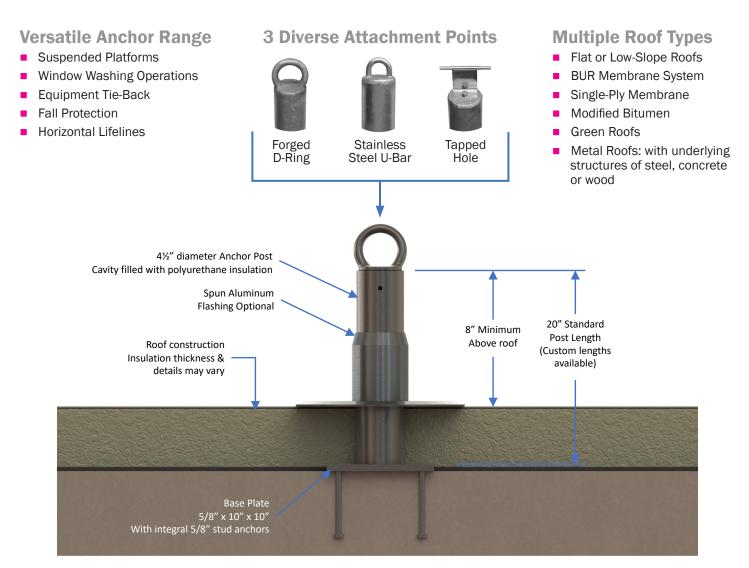

Contact us for applications on moderate to high slope roofs.

Use Kee Safety flashings with Kee Safety anchors for best compatibility.

Anchors can be designed into the structure of your building by calculation in accordance with ANSI/AISC 360-16. Contact our team for calculations and complete design packages.

Made in the USA.



Canada

Kee Safety, Ltd. 40 North Rivermede Road, Units 6 - 7 Concord, Ontario L4K 2H3

Tel: (905) 669 1494 Fax: (905) 669 4347 Toll Free: (877) 505 5003

www.keesafety.ca

Kee Klamp, Kee Lite, Kee Stainless, KeeGuard, Kee Dome, Kee Hatch, Kee Mark, Kee Access, Kwik Kit, Kee Anchor, Weightanka, Wireanka, KeeLine, Kee Walk and Kee Projects are all registered trademarks of Kee Safety Ltd, Beam Clamp, and Box Bolt are all registered trademarks of Access Technologies Ltd, a subsidiary of Kee Safety International Ltd. While every effort has been made to ensure the accuracy of the information contained in this brochure, Kee Safety, Inc cannot be held responsible for any errors or omissions. Kee Safety, Inc reserves the right to alter or withdraw products without prior notice. Kee Safety, Inc does not accept responsibility for any loss or damage arising from improper use of its products. Copyright 2020 Kee Safety, Inc. All Rights Reserved.